



230V Gearmotor

MAX. LEAF WEIGHT

1.800 Kg

MAX SPEED

9,6 m/min.

USE FREQUENCY


Continuous use



PRODUCT'S PLUS

- Renewed gearmotor with integrated E781S LC control unit featuring adjustable speed control levels. Includes two dedicated inputs for safety edges (NC or 8.2 KOhm) and Bus2Easy technology.
- New high-performance retroactive feedback motor control with high-resolution encoder: smoother acceleration and deceleration ramp, force optimization, reduced consumption, adjustable sensitivity to obstacle detection.
- Compatible with the Simply Connect platform and with the new FDS radio technology.
- Integrated Low Consumption Functionality in Standby Mode: The control unit is designed with low power standby (LC) functionality, in compliance with the Ecodesign Directive 2009/125/EC and EU Regulation 2023/826. The low-power mode can be easily enabled or disabled via the board's menu. If enabled, it activates automatically after a few minutes of inactivity, reducing standby power consumption (<0.5W, or 2W if connected to Simply Connect). This ensures energy efficiency, reduced operating costs and a positive environmental impact.

INSTALLATION DIMENSIONS

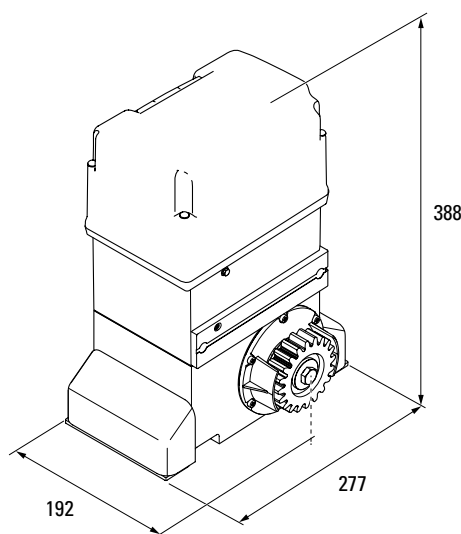


AUTOMATION FOR SLIDING GATES

844 C

230V Gearmotor

FAAC




TECHNICAL SPECIFICATIONS

Model	844 C Z16
Power supply voltage	220-240V~ 50/60 Hz
Max. power	680 W
Pinion	Z16 module 4
Max expressed force	1300 N
Max. leaf weight	1800 Kg.
Max. leaf speed	9.6 m/min
Max. leaf length	40 m
Stopping space	30 mm
Protection class	IP44
Thrust capacitor	18 µF
Operating ambient temperature	-20° ÷ +55°C *
Thermal protection	120°C automatic rearming
Weight	16.9 Kg

(*) The 230V version can operate at temperatures from +55° to +65° under the following conditions: Frequency of use 28 cycles/hour, Maximum load on accessories (including Bus2Easy accessories) 400 mA (instead of 500 mA). Cycles/hour refer to a gate of maximum weight and 5 m width.



INSTALLATION EXAMPLE

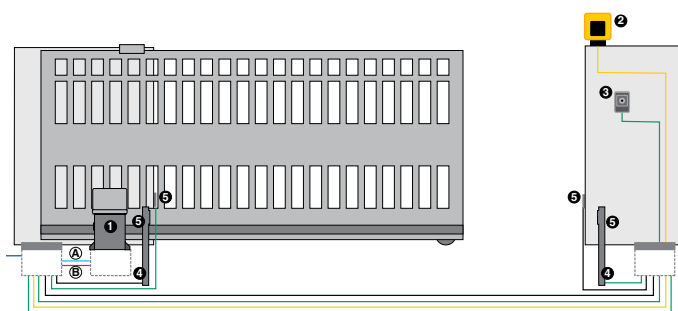

A Low voltage cabling
2x0,50 mm² cable
■ 3x0,50 mm² cable

B Power cabling (230V)
2x1,5 mm² + T cable
2x1,5 mm² cable

REF	Q.TY	DESCRIPTION
1	1	Gearmotor 844 C Z16
1	1	Foundation plate with lateral and height adjustments (6 pc. pack)
1	4	Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
1	1	XF 433 MHz receiver
2	1	XLED flashing light
3	1	Key operated button XK10B
3	1	Lock with key
5	2	Low column H500 (multiple saleable quantity 2 pcs)
5	2	Foundation plate for column
5	2	Pair of photocells XP 30B
5	2	Adaptors for wall columns
1	2	channels transmitter XT02 433

www.faactechnologies.com

FAAC S.p.A - Soc. Unipersonale - Via Calari 10 - 400069 Zola Predosa (BO) Tel. +39 051 61724